PCT

WORLD INTELLECTUAL PROPERTY ORGANIZATION
International Bureau

INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification 6 : G06F 151/00, 153/00	A1	(11) International Publication Number: WO 97/21183
		(43) International Publication Date: 12 June 1997 (12.06.97)

(21) International Application Number: PCT/US96/19509

(22) International Filing Date: 6 December 1996 (06.12.96)

(30) Priority Data:
08/569,639   8 December 1995 (08.12.95)   US

(71) Applicant: BELL COMMUNICATIONS RESEARCH, INC. [US/US]; 445 South Street, Morristown, NJ 07960-6438 (US).

(72) Inventors: NAQVI, Shamin, Abbas; 19 Spring Valley Road, Morristown, NJ 07960 (US). IMIELINSKI, Tomasz; 153 Willowbrook Drive, North Brunswick, NJ 08902 (US).

(74) Agents: GIORDANO, Joseph et al.; International Coordinator, Rm. 1G112R, 445 South Street, Morristown, NJ 07960-6438 (US).

(81) Designated States: CA, JP, KR, European patent (AT, BE, CH, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE).

Published
With international search report.

(54) Title: METHOD AND SYSTEM FOR PLACING ADVERTISEMENTS IN A COMPUTER NETWORK

(57) Abstract

A method and system for placing advertisements in a computer network. A server containing a collection of advertisements is placed in electronic communication with the computer network. The advertisements on the server are not tied to any particular page containing information on the network, but rather, are retrieved in response to a query entered by the user (17) and dynamically mixed with the content of the pages returned in response to the query (16). The present invention displays the content pages with focused, targeted advertisements as a part of the page, in accordance with a particular layout. The advertisements can be made to satisfy a set of constraints (19) requested by the advertiser, as well as the constraints of the publisher of the page. The system uses contracts (21) to specify the marketing rules (18) that link ads with specific queries, to permit advertisers to target a specific audience, and to guarantee a certain amount of exposure of the advertisement in prime advertising space. Algorithms are used to check for contract consistency to ensure that all contracts that are accepted can be properly satisfied. The present invention also provides a download delay-time advertising feature.

METHOD AND SYSTEM FOR PLACING
ADVERTISEMENTS IN A COMPUTER NETWORK

NOTICE OF COPYRIGHTED MATERIAL IN DISCLOSURE

A portion of the disclosure of this patent document
contains material which is subject to copyright protection.
The copyright owner has no objection to the facsimile

5   reproduction by anyone of the patent document or the patent
disclosure, as it appears in the Patent and Trademark
Office patent file or records, but otherwise reserves all
copyright rights whatsoever.

BACKGROUND OF THE INVENTION

Field of the Invention

The present invention relates generally to advertising
and, in particular, to a method and system for placing
advertisements in a computer network, such as a wide area

15   network or a metropolitan area network.

Description of the Prior Art

A number of information services are currently offered
on wide area public networks, such as the Internet. The

20   basic model of these services is that a query is processed
and a set of answers is returned. For example, a number of
yellow page searchable directories have been developed in
which users can query categories of products or services
(e.g., new car dealers) and the system returns a set of

25   vendors satisfying the query.

One problem with these services is determining who
should subsidize the end user's cost of using the services.
One way of providing such a subsidy is through the use of

- 1 -

advertisements. Public networks, such as the Internet, are
starting to see random use of advertisements. For example,
some search engines used in public networks are sponsored
by a single vendor or company. The sponsoring vendor or

5   company will often have an advertisement displayed on a
user's computer screen during use of the search engine.
Other search engines display randomly selected
advertisements from a fixed set of advertisements.

As one example, a number of services on the World Wide

10   Web ("WWW") are currently using ad hoc means of
advertising. That is, when a user uses certain search
engines for conducting a search, the user will be shown
advertisements while doing the searching. These
advertisements are sometimes referred to as "banner"

15   advertisements because they simulate a banner that the user
sees as the user is traveling down a "road" on the computer
network. These advertisements are typically tied to a
particular search page that the user encounters during the
search.

20   The current state of the art is such that when the
user uses a search engine, a randomly selected
advertisement is shown as if it is part of the search page.
For example, the user may enter a search request to see a
home page on cooking and, as a part of that page, the

25   existing systems might display an advertisement about cars.
This is a problem, of course, because there is no
connection made between the content of the advertisements
or the message of the advertisements and what the user is
actually searching. Another problem with the current

30   state of the art is that there is no guarantee associated
with the advertisements that they will be shown a certain
number of times or in a certain place on the page with

- 2 -

respect to the other pieces of data on that page. For
these reasons, the existing systems for placing
advertisements on computer networks, such as the Internet,
fail to take full advantage of the interactive/demand
5   driven environment of the online medium.

SUMMARY OF THE INVENTION

It is thus an object of the present invention to
provide an improved method and system for advertising on a
10   computer network, particularly a wide area or metropolitan
area network, which overcomes the above described problems
of existing advertising systems.

It is a further object of the present invention to
provide an effective advertising medium that anyone with a
15   personal computer can use to advertise on computer
networks.

It is a further object of the present invention to
provide a method and system for advertising in which
advertisements are more informative and provide a direct
20   link to additional information about the advertised product
or service or about the advertiser.

It is a further object of the present invention to
provide a method and system for advertising on a computer
network in which advertisements are more focused and
25   targeted, for example, by user queries and user profiles,
including the past history of the user's interactions with
the system.

It is a further object of the present invention to
provide a method and system for advertising in which new
30   online publishers can be created with little effort.

It is a further object of the present invention to
provide a method and system for advertising in which

- 3 -

advertisers can be guaranteed that their advertisements
will be displayed a certain number of times or in a
particular manner or under particular circumstances.

Additional objects, advantages and novel features of
5   the invention will be set forth in the description which
follows, and will become apparent to those skilled in the
art upon reading this description or practicing the
invention. The objects and advantages of the invention may
be realized and attained by the appended claims.

10   The present invention provides a new process and
system for online advertising. This new process will be
referred to throughout this application as query-based
advertising ("QBA"). In the QBA process, advertisements
are primarily triggered by user queries. User queries, as
15   used herein, refer to requests from an information consumer
for one or more pages of information from a computer
network. As a result of a query, a user is exposed to
advertisements with the present invention, i.e., the query
triggers advertisements.

20   In accordance with the present invention, a server
containing a collection of advertisements is placed in
electronic communication with a computer network. The
computer network is preferably a wide area network, such as
the Internet, or a metropolitan area network. As used in
25   this application, the phrase "computer network" refers to
any public or private data communications network.

The advertisements on the server are not tied to any
particular page containing information on the computer
network. Rather, the advertisements are contained on the
30   server, distinct from the pages that may or may not later
carry the advertisements. The pages by themselves have no

advertisements. Thus, the pages are analogous to a
newspaper or magazine devoid of any advertisements.

        When the user requests a certain page or a certain
topic of information, the relevant pages are retrieved from
5   the computer network and shown to the user. The present
invention, upon receiving the user's request, retrieves
advertisements that are related to the user's action,
dynamically mixes the advertisements with the content of
the pages according to a particular layout, and displays
10   the pages with focused, targeted advertisements as a part
of the page. The advertisements can be made to satisfy a
set of constraints requested by the advertiser, as well as
the constraints of the publisher of the page, as further
discussed below.

15   The advertisement triggering mechanism of the present
invention is not random or coincidental, but rather, is
prespecified in advance. This specification will be
referred to in this application as a contract. A contract
specifies the marketing rules that link advertisements with
20   specific queries. For example, a diet soft drink
advertisement may be shown when a user asks for a page
about exercising equipment. These rules are specified by
advertisers implementing the concept of "focus" or
"relevance" of advertisements and help the advertisers to
25   target a specific audience. Owners of pages specify the
focus content of their pages through special tags within a
page. These tags are not displayed to the information
consumer; the tags are used to decide what advertisement
can be shown when the page is requested by a consumer.

30   The notion of a contract, however, goes well beyond
just marketing rules. First of all, the advertising space
on the online medium, although technically unlimited, is

severely restricted by the user's attention span. Placing
advertisements on the first page which constitutes the
answer to a query gives the advertisements much higher
probability to be seen than on later pages of the answer.

5   This is analogous to a certain extent, to newspaper
advertising where advertising on the first page of the
newspaper is more expensive than on the last page of the
newspaper. Thus, the present invention introduces the
concept of prime space as a part of the QBA.

10   Prime space will be used in this application to refer
to limited advertising space on the first page of the
answer to a query. Prime space is, in principle, as
attractive as prime time television. Prime space, like
prime time, is limited so it may be impossible to show all

15   the relevant advertisements in prime space.

As a solution to the prime space limitations, the
present invention provides guarantees to advertisers
through the use of contracts. The contracts provide tools
to specify such guarantees and to enforce them.

20   Specifically, the present invention provides the following
types of guarantees (or "contracts") to advertisers:

1.   Ratio-based: The ad will be shown in prime space
no less than a certain percentage of the times a
relevant query is made by a searcher.

25   2.   Exclusive or Competitive: Ad A is never to be
shown in prime space when ad B is shown.

3.   Dependent: Ad A is to be shown with a
predetermined probability when ad B is shown in
prime space.

30   4.   Story: An ad consisting of several sub-ads will
be shown in prime space in sequence to a
consumer.

- 6 -

5.   Frequency-based: The ad will be shown in prime
space a certain number of times in a given time
period (e.g., 100 times per month).

Additionally, the contracts may also specify the type

5   of layout used to mix ads together with the data. This may
include the layout types, and so forth.

The present invention also provides means for
determining whether there are any contracts that cannot be
satisfied. For example, if the prime space is sufficient

10   to hold only two ads, it is impossible to guarantee 100%
ratio for more than two ads. Similarly, if ad A is never
to be shown when ad B is shown and if both ad A and ad B
are equally relevant according to focus matching, then it
is impossible to guarantee ratios above 50% for both ads A

15   and B.

The present invention uses algorithms to check for
contract consistency to ensure that all contracts that are
accepted can be properly satisfied. An advertiser can ask
for a certain contract (e.g., 5% relative coverage in prime

20   space) and the present invention will determine whether
that contract can be satisfied. If not, the system
suggests what coverage it can provide. After the contract
is determined to be consistent, the present invention will
enforce the contract by displaying advertisements in

25   accordance with the contract.

A consequence of QBA is that ads cannot be placed on
pages a priori because it is the query that determines what
ads are to be placed on a page. This is referred to as
dynamic advertising. The query asks for a page that has a

30   focus. Ads that are resident in the system are checked to
determine which ads can potentially be placed on the page
in question. This decision is based on matching the focus

- 7 -

of a page with the focus of the ad. When not all matching
ads can be placed on a page because of space limitations,
the contract enforcement feature of the present invention
ensures that the ads that are placed on the page are
5   consistent with the contracts signed by the system with the
advertiser.

       Another consequence of QBA is that it must be
determined where to place an advertisement on a page.
Currently, pages on the WWW have a fixed a priori agreed
10   upon area on a page for advertising. The present
invention, however, dynamically determines where an
advertisement should be placed. The present invention
permits owners of pages to be free to organize the layouts
of their pages. The page owner makes the final
15   determination of where an advertisement should or should
not be placed. Once the page is organized, the page owner
can specify where an advertisement can be placed by placing
a special tag ("ad space") on their page. Like the focus
tag, this ad space tag is not visible to the consumer. It
20   is a directive to the advertising system that the tag
denotes space available for advertising, i.e., the tag can
be thought of as a billboard stating "this space available
for advertising."

       The present invention also provides a download delay-
25   time advertising feature. Most consumers on computer
networks, such as the Internet, experience a delay from the
moment they ask for a page to the time the page is
downloaded to their browser. This delay may be caused, for
example, by traffic congestion on the WWW. This delay time
30   will be referred to as download delay-time.

       The present invention uses the download delay-time to
display ads to the consumer. This will be referred to as

down-load delay time advertising. The time that the
consumer would have waited for a page to be downloaded is
utilized to expose the consumer to ads. Once a page (or a
subpart of the page) has been downloaded to the consumer's
5   browser and is available to be displayed, the ads are
replaced by the page content. The consumer does not
experience a delay due to advertising by the present
invention. Only the preexisting delay time is utilized by
the advertising system.

10   In summary, the present invention provides a system
and method for advertising on a computer network,
comprising a server containing a plurality of
advertisements, means for electronically connecting the
server to a computer network, and means for selecting and
15   retrieving an advertisement from the server in response to
a query entered on the network. The selecting means
comprises means for ensuring that a selected advertisement
is relevant to the query. A mixer means is provided for
combining a retrieved advertisement with a content page
20   returned by the computer network in response to the query.

The mixer means comprises a layout manager means for
computing an optimum layout of a combined page containing
the retrieved advertisement and the content page. The
mixer means also comprises a typography manager means for
25   detecting special tags and HTML rules in the content page
and for determining which part of the content page the
selected advertisement can be displayed on. The content
page is provided by a home page dispatcher, a search
engine, or a generic HTML content provider in response to
30   the query.

A transaction means is provided for permitting a user
to make a transaction with the advertiser by interacting

- 9 -

with the displayed advertisement. A prime space manager
means is provided for controlling when the advertisements
contained on the server are selected by the selecting
means, the control being based upon respective advertiser
5   contracts associated with each of the advertisements.

An ad placement means is provided for placing new
advertisements on the server, the ad placement means having
means for entering an advertiser contract for each
advertisement placed on the server and means for checking a
10   new advertiser contract for consistency with existing
advertiser contracts. A local client means is provided for
displaying a retrieved advertisement only during a download
delay time period in which a user is waiting for a content
page to be downloaded in response to the query. A means
15   for refreshing a displayed advertisement after a
predetermined time period of inactivity by the user, and a
means for replacing a displayed advertisement with a
downloaded content page as soon as the content page is
received by the client are also provided. The system
20   includes means for calculating a search time estimation for
the query, and means for combining a page containing the
search time estimation and a retrieved advertisement. The
system also includes means for determining a geographic
location of a user, and means for selecting an
25   advertisement based upon the user's geographic location.

BRIEF DESCRIPTION OF THE DRAWINGS

The present invention will become more clearly
appreciated as the disclosure of the present invention is
30   made with reference to the accompanying drawings, wherein:

Fig. 1 is a schematic diagram providing a general
overview of the main components of the present invention.

- 10 -

Fig. 2 is a flow chart showing a process of placing advertisements on content pages provided by yellow page publishers of a computer network.

5   Figs. 3A-3D are screen prints showing page views displayed during various steps in the process of Fig. 2.

Fig. 4 is a flow chart showing the process performed by the layout manager of the present invention.

Fig. 5 is a flow chart showing the process performed by the parser of the present invention.

10   Fig. 6 is a flow chart showing the process performed by the mixer and ad selector of the present invention.

Fig. 7 is a flow chart showing a process of placing targeted advertisements in online pages provided by a home page publisher of a computer network.

15   Figs. 8A-8C are screen prints showing page views displayed during various steps in the process shown in Fig. 7.

Figs. 9A and 9B are flow charts showing a billing system process according to the present invention.

20   Fig. 10 is a flow chart showing the steps of an ad placement process according to the present invention.

Fig. 11 is a flow chart showing the steps of a page placement process according to the present invention.

Fig. 12 is a schematic showing the architecture of a

25   transaction system according to the present invention.

Figs. 13A and 13B are screen prints showing page views displayed during various steps in a transaction process of the present invention.

Fig. 14 is a flow chart showing the steps of the

30   transaction process according to the present invention.

- 11 -

Fig. 15 is a diagram chart showing the process
performed by the prime space manager component of the
present invention.

5   **DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENT**

Reference will now be made in detail to a preferred
embodiment of the invention, an example of which is
illustrated in the accompanying drawings.

Fig. 1 provides a general overview or space
10   architecture of the main components of the present
invention. The layout manager 10 is primarily responsible
for the computation of the layout of a page to be displayed
to a client. Other modules of the system compute the
necessary data that is to be displayed, as described below.
15   The layout manager 10 then accepts this data from the
other modules and computes the optimum layout for the
display.

The layout manager 10 uses two sub-components to
determine the optimum layout; a rule base and a layout data
20   base within the layout manager (collectively shown as the
layout rules component 11 in Fig. 1). The layout data base
contains a collection of templates that have been
predefined and stored in the layout data base. The rule
base contains a collection of rules defined by the user or
25   by the placer of the layout manager to ascertain which
layout templates are best under what set of conditions.
When the layout manager 10 receives the data to display, it
invokes various rules in the layout rules to figure out
which rule to trigger and, hence, decides on one layout as
30   being the best under the present set of conditions.

The variables used in the rules are the amount of data
that is to be displayed, the kind of data that is to be

displayed, the amount of text, the amount of advertising material, and the size of the various maps and multi-media icons that are to be displayed. Based on these variables, the rules are checked and one or more rules are picked as

5   delineating the best layout that can be found. The layout manager 10 then arbitrarily picks one of the rules that it thinks are the best and picks that layout, inserts the data given to it in the layout template, and gives the final product to the client to be displayed.

10   The variables that are expressed in the rules are based on a number of parameters including the size of the text, the amount of text, the size of the maps, the size of the images, and the size of the advertisement. In principle, there is no limit as to the number of parameters

15   that one can achieve using the layout manager 10. The rules are preferably expressed in a programming language general enough to take any other parameters that one may desire to furnish.

The layout rules are constructed based on various

20   parameters. The layout rules are then checked and used to pinpoint the exact template to be used for a certain kind of data situation. The template is then filled in by the layout manager 10 to provide a display to the client.

Next, the segmenter 12 will be described. The

25   segmenter 12 is responsible for analyzing an HTML page and for extracting the relevant data from the HTML page. The purpose of the segmenter 12 is that, if the system is given a page constructed by another component or by some other content provider, the segmenter 12 will try to find

30   reasonable places within that page where a certain advertisement could be inserted dynamically.

The segmenter 12 uses various rules for finding
advertising space within a page, and for preventing the
essential layout of the page from being disturbed. In
particular, the segmenter 12 looks for certain special tags
5   inserted by the designer of the HTML page and replaces
those special tags with advertisements or other types of
information that it has been given. The segmenter 12 then
looks at the page, decides where to insert ads, and
provides that information to the layout manager 10.

10   In most instances, the typography manager 14 is the
main input device to the layout manager 10. One exception
to this will be described later. The typography manager
14's role is to "render" the page. By rendering the page
it is meant that the typography manager 14 takes various
15   kinds of input that has to go on a page and decides which
part of the information has to go on the page and which
part of the information could in fact be deleted. Thus,
the typography manager 14 is similar in function to a
typographer in a traditional publishing situation.

20   The typography manager 14 has the final say in what
data gets sent to the layout manager 10. The typography
manager 14 also detects special tags and special HTML rules
that tell it where the markups of the HTML page are
supposed to happen. Ultimately, the layout manager 10 and
25   the typography manager 14 collaborate on coming up with a
page. This page in its final form is then passed to the
gate 15.

The gate 15 transfers a page from the system of the
present invention to the client. The gate 15, therefore,
30   provides the gate between the client and the server. The
gate 15 gives the page that it wants to display to the WWW

- 14 -

Daemon 16 and the Daemon interacts in turn with the client 17 on the user's side.

The above description has explained how the layout manager 10, the segmenter 12, the typography manager 14,

5   and the gate 15 operate. Before describing in detail the remaining components of the system, an example flow of a request through the system will be explained.

Initially, a user requests a particular piece of information through one of the clients 17. The user's

10   request is given to the WWW Daemon 16, which passes the information to the gate 15. The gate 15 at this point decides what piece of information is being requested by the user and finds other relevant pieces of information that can be commingled with what the user has asked. The user,

15   for example, might ask the system to see certain car dealers, to find a phone number of a car dealer, or to get a page of a particular magazine.

The gate 15 at this point gives the request to the matching rule engine 18 ("MRE"). The purpose of the MRE 18

20   is to look at the content of the user's query and to find a category within its active index SIC 19 that matches the same type. If the user has asked for car dealers, the MRE 18 invokes its rules to determine that car dealers are part of a class of things relating to transportation. Based on

25   the classification determined by the MRE 18, the system now knows that the user is asking about cars or about transportation or about whatever else that the user might be interested in.

The MRE 18 at this point then returns to the gate 15

30   the category index of the user's query. If the user had asked about cars or about family sedans or about sports cars, at this point the MRE 18 would have figured out that

- 15 -

the user's interest falls into a certain category. Based
on the user's interest category, the system then retrieves
the advertisements that are relevant to that category.
Thus, the purpose of the MRE 18 is to figure out what the
5   user requested, to place the user's request in a category
of a classification system (i.e., the active index SIC 19)
and, based on that classification, to retrieve relevant
advertisements.   At this point there may be several
hundred related advertisements retrieved from the category
10   containing the user's request. This creates a problem in
that there will be many more advertisements related to the
user's request than can possibly be shown to the user on
the first page of information. At this point, the prime
space manager 20 comes into play. The purpose of the prime
15   space manager 20 is to prioritize the advertisements that
are to be shown to the user.

       For example, if there is only room for five
advertisements and the MRE 18 returns a list of 500
possible advertisements to show, the system must determine
20   which five of the ads to show. The operation of the prime
space manager 20 is based on a set of contracts that were
accepted when the advertisers placed their advertisements
with the system. The system supports the following five
basic types of contracts:

25   1.   Ratio-based: The ad will be shown in prime space
                   no less than a certain percentage of the times a
                   relevant query is made by a searcher.
         2.   Dependent: Ad A is to be shown with a
                   predetermined probability when ad B is shown in
30   prime space.
         3.   Exclusive or Competitive: Ad A is never to be
                   shown in prime space when ad B is shown.

- 16 -

4. Story: An ad consisting of several sub-ads will
    be shown in prime space in a particular sequence
    to a consumer.

5. Frequency-based: The ad will be shown in prime
    space a certain number of times in a given time
    period (e.g., 100 times per month).

Additionally, the contracts may also specify the type
of the layout used to mix ads together with the data. This
includes the layout types, and so forth. The various
contracts used by the system will now be discussed in more
detail.

The ratio-based contracts are used where an advertiser
wants the advertisement to be displayed a certain
percentage of the time in prime space. In other words,
when a query is received that is related to the business of
the advertiser, the advertiser is guaranteed that its
advertisement will be on the first screen of information
displayed to the user a certain percentage of the time
(e.g., 15% of the time). This percentage is called the
coverage guarantee. The ratio-based contract provides a
coverage guarantee to the advertiser that its advertisement
will be displayed X% of the time for every relevant query.
This guarantee is probablistic in nature, so that over the
long run of the system, the probability will converge to
the percentage that the advertiser has requested.

The second kind of contract that the system supports
is referred to as a dependent contract. The dependent
contract guarantees that one advertiser's ad can be shown
in conjunction with another advertiser's ad on the same
screen. For example, a travel destination advertisement
(e.g., "Come to the Bahamas") can be shown on the first
screen of information together with a credit card

- 17 -

advertisement (e.g., "Pay for your ticket through VISA").
With this type of contract, the system can support
contracts that satisfy the needs of two or more advertisers
at the same time.

5   The third type of contact supported by the system is
called an exclusive or competitive contract. This type of
contract can be used to guarantee that an advertiser's ad
is not shown at the same time or on the same page as a
competitor's advertisement. For example, a beverage

10   manufacturer (e.g., Coca-Cola) can prevent a competing
beverage manufacturer's (e.g., Pepsi's) ads to be shown at
the same time as its own ads and vice versa.

          The fourth kind of contract is called a story
contract. This type of contract is used to guarantee an

15   advertising package in which a sequence of two or more ads
are shown together. The ads can be displayed so that the
user sees a first part of the advertisement, then sees a
second part of the ad, and then sees a third part of the ad
and so on. For example, an advertisement for coffee might

20   consist of a picture on a first page showing somebody
drinking a cup of coffee; a picture on a second page
showing them putting the coffee cup away; and a picture on
a third page identifying the name of the advertiser's
product (e.g., "Maxwell House makes a good cup of coffee").

25   Thus, the story contract guarantees that an
advertiser's ads will be shown in the form of a story. The
story contract is desirable where a group of ads must be
shown together in a particular order to make sense.

          The fifth kind of contract is the frequency-based

30   contract. This contract is used where the advertiser wants
to guarantee that its advertisement will be shown a certain

number of times over a given time period (e.g., 100 times per week).

Several different combinations of the above-described types of contracts can also be used. For example, an
5   advertiser can enter a story contract which also guarantees that its advertisement will not be shown at the same time as its competitors ads are shown, that its advertisement will be shown at the same time that a related advertisement is shown, and that its advertisement will be shown in prime
10   space a certain percentage of the time.

The prime space manager 20 has the responsibility of determining all the possible advertisements that can be shown in conjunction with the information requested by the user. The prime space manager 20 then decides which ads to
15   show based on the particular contracts that have been signed. If a contract has already been entered with an advertiser's competitor, the prime space manager 20 will make sure that it can in fact satisfy the new contract with the advertiser. Thus, the prime space manager 20
20   dynamically makes a decision of which advertisements to show given the amount and the number of advertisements that it can possibly show. The end result of the prime space manager 20's computation is that the system knows exactly which advertisements can and will be shown to the user.

25   These advertisements are then given to the gate 15. The gate 15 at this point gives the ads to the typography manager 14, and the typography manager 14 determines how best to display the information. The page information then comes back to the gate 15 and is forwarded to the client
30   17.   In the above description of the present invention, the advertisement contracts, the active index SIC 19, the layout rules 11, the segmenter 12, the segment

- 19 -

rules 13, the layout manager 10, and the typography manager 14 have been explained.

During the computation of the advertisements and all the other computations that the system of the present invention performs, a logging module 22 of the system performs extensive logging of what the user has asked, what advertisements were shown, how long the advertisements were shown, and which advertisements were shown to which user. The logging module 22 then stores these logs in a SYS logs database 23. Various scanned reports can be produced and defined using the information in the SYS logs database 23.

A local client 24 of the present invention provides a download delay-time advertising feature. Download delay time refers to the delay experienced by most users of computer networks from the moment a page is requested to the time the page is downloaded to their browser. The download delay-time advertising feature utilizes the time that the consumer would have waited for a page to be downloaded to expose the consumer to ads. Once a page (or a subpart of the page) has been downloaded to the consumer's browser and is available to be displayed, the ads are replaced by the page content.

In most cases, when a user asks for a page there is a considerable download delay time. The user must wait for the page after the request for a few seconds or, in certain cases, a few minutes before the page is finally downloaded by the network. The present invention uses this delay time to show advertisements, while taking care that the delay time of the user is not increased by showing the ad. Thus, the only time an advertisement is displayed is the time that the user would have had to wait anyway. While the

user waits for the page, the user can view the
advertisements on the local client 24.

The information brokers or content providers shown in
Fig. 1 include a home page dispatcher 25, a search engine
5   INFORMIX 26, and a generic HTML 27. For purposes of the
present invention, it is assumed that there are three broad
classes of publishers that can utilize the advertising
features of the present invention. A "publisher" can
include virtually anyone that provides content to the
10   network. For example, anyone who is a home page owner is a
publisher in the category shown as Generic HTML 27. A
second kind of publisher is the search engine publisher 26,
which includes phone company yellow page providers, such as
NYNEX. And a third kind of publisher is the so-called home
15   page dispatchers, which include traditional magazines and
newspapers, such as Business Week.

The present invention distinguishes between these
three types of publishers. If the publisher is a home page
dispatcher 25, the publisher provides its own content and
20   intersperses the content with certain special tags
indicating where ads can and cannot be placed and
indicating where the focus of the content is about certain
topics. These special tags are then used to trigger
certain actions in the system of the present invention
25   relating to the type of content contained on the page and
the kinds of advertisements that can be placed on the page.

The second kind of publisher that the present
invention is used with is the search engine publisher 26.
Currently, there are many companies on the WWW that permit
30   users to query their database and then return a set of
answers from the database to the user. For example, a
telephone company may have a site that allows a user to

- 21 -

obtain a set of phone numbers and business names for a
particular type of business (i.e., a yellow page
directory).

For purposes of the present invention, the search
5   engine publisher 26 is distinguished from the home page
dispatcher 25 in the sense that the content returned by the
search engine publisher 26 does not contain any special
tags or meta comments put in by the publisher to define the
layout of the content and the ads. In this case, the
10   layout manager 10 of the present invention computes the
optimum layout based upon the rules and layout templates,
as described above. The final result, therefore, is that
output is taken from the search engine publisher 26,
adorned with certain relevant advertisements, and then
15   shown to the users.

The third kind of publisher, the generic HTML
publisher 27, includes those publishers that the present
invention assumes are people who have designed their own
home page, perhaps taking great care to provide a desired
20   appearance. These publishers will probably not have
inserted any special tags or meta comments into their home
page to guide the advertising system of the present
invention. In this case, the system of the present
invention can either try to find a space in the home page
25   that it thinks is reasonable without violating the desired
appearance of the page, or it can insert the advertisement
before or after the page. That is, if the segmenter 12
cannot find a suitable place within the page that the
generic HTML publisher 27 has already designed, it will
30   place the advertisement on the proceeding or the following
page. This is more likely to occur if the owner of the
page has not provided any special tags or meta comments, or

- 22 -

if copyright concerns prevent the insertion of a certain
advertisement within the page.

In summary, the present invention partitions the
publishers (i.e, the information brokers) into three
5   categories: the home page dispatchers 25, the search engine
publishers 26, and the generic HTML home page providers 27.
The distinction between the three is that the home page
dispatchers 25 intersperse their content with special tags
or meta comments which helps the present invention in
10   determining where to place the advertisements and what kind
of advertisements to place, the search engine kind of
publishers 26 return unadorned results of queries and the
present invention is free to reformat and relay out the set
of answers, and the generic HTML home page publishers 27
15   are publishers that have meticulously crafted their home
pages, usually without special tags or meta comments, so
that no guidance is provided to determine an appropriate
space for placing an ad.

The segmenter 12, which is the module of the present
20   invention whose responsibility is to find a place somewhere
on a generic HTML page to place an advertisement, may not
succeed in finding a space on a generic HTML home page. In
this case, it will either place the advertisement on a
proceeding or a following page. Most, if not all, of the
25   publishers on the WWW will fall into one or more of these
three categories.

In Fig. 1, the acronym LA refers to List of Ads, Q
refers to the user's query, CGI is a standard WWW
abbreviation for "common gateway interface," HTML is a
30   standard abbreviation for hypertext markup language, and Ly
is the list from the layout manager 10 to the typography

manager 14 that indicates a list of pages that have to be displayed.

Referring to Fig. 2, a flow chart is provided that describes the main flow of the process of placing ads on content pages provided by yellow page publishers, in accordance with the present invention. The process begins at START 30 when the client provides a query to the system. For purposes of illustration, the query depicted is a yellow page query in which a user requests some item of interest, and the publisher is a yellow page publisher (please refer to the previous discussion for a description of the three kinds of publishers).

For example, the user may submit a query form asking for a listing of all car dealers in Morristown, New Jersey. This query form is evaluated by the box 31 entitled YP QUERY FORM. The purpose of this evaluation is to determine the type of the query (e.g., is the user interested in cars, a particular geographic region, etc.).

In using a yellow page publisher there are two broad distinctions for a query. A client may be asking for a certain category of listings, or the client may be asking for a particular vendor. For example, the user could ask for car dealers in Morristown, NJ (i.e., a category of listings), or the user could ask for Morristown BMW located on South Street in Morristown, NJ (i.e., a particular vendor). The system determines which of the two types of queries or searches the user has made, as illustrated by box 32 in Fig. 2. If the query is for a certain category, the process will go to the left hand side of the flow chart of Fig. 2, and if the query is for a certain vendor, the process will go to the right hand side of the flow chart of

Fig. 2. The left hand side of the flow chart will be
explained first.

       After determining the type of query, the category
search engine 33 next determines which category best fits
5   the user's request. The user may have asked for "car," but
the category in the yellow page provider's index may in
fact say "automobile." Or, the user may have asked for
"spectacles," and the category in the yellow page provider
may be called "optician." The matching of these variations
10   of terms is performed by the category search engine 33.

       Once it has been determined which category the user's
request falls into, the advertisement selection process
comes into play with the ad selector 34. The ad selector
34 determines what advertisements are best suited to be
15   mixed in with what the user has requested. The content
from the category search engine 33 and the ad(s) from the
ad selector 34 are then given to a mixer 35. The mixer 35
functions to mix the content coming from the search engine
with the ad(s) selected by the ad selector 34. The result
20   is the creation of a page that is of interest to the user.

       If the user's category was about cars, at this point
the ad selector 34 would have presumably found
advertisements related to cars and displayed these ads at
step 36 to the user. The user at this point can select one
25   or more of the listed or advertised car dealers. This
again results in more advertisements being selected by the
ad selector 34, as well as the accessing of a vendor search
engine 37 provided by the yellow page publisher, and a new
page being shown to the user.

30   Referring to the right hand side of Fig. 2, if the
user requests a particular vendor, the system will first do
a search time estimation 38 to figure how long it will take

to find the piece of information requested by the user. At
the same time, the ad selector 34 will perform a search for
the advertisements that are to be shown to the user. As
soon as the relevant ads are found by the ad selector 34,

5   the ads are mixed with the search time estimation
information and both are displayed to the user. At this
point 40 in the process, the user is asked for a
confirmation of whether to continue with the requested
search given the estimated search time. Upon receiving

10   confirmation from the user, the ad selector 34 will again
be accessed, as will be the vendor search engine 41. The
first set of ads returned by the ad selector will continue
to be displayed to the user for viewing until the search
results from the vendor search engine 41 are available.

15   When the vender search engine 41 completes the search,
it returns the search results to the mixer 35. Similarly,
the ad selector 34 returns a second set of ads to the mixer
35. The mixer 35 mixes the ads with the content provided
by the vendor search engine 41 and forwards the combined

20   page to the page display 42.
The result of this process is that a yellow page
inquiry posed by the user is categorized either as a
category search or a vendor search. In both cases, the
type of the query is matched with a certain category of

25   ads, the search results and the ads are mixed, and a page
is constructed and shown to the user. Upon further input
from the user, the system selects and mixes a second set of
ads with the content page of the publisher, and another
page containing ads is constructed and shown to the user.

30   The "focus" arrows 43 shown in Fig. 2 indicate that a
certain focus is associated with each category. The query
may have been directed to a category of listings or a

- 26 -

particular vendor.   In both cases there is a "focus"
associated with the content of the query (e.g.,
automobiles, physicians, lawyers, etc.).   In addition,
there may be a focus associated with the geographic

5   location of the user to permit advertisers to target users
in particular geographic regions.   The focus process plays
a major part in the present invention.   No advertisements
are shown unless it can be determined that the
advertisements are in some way focused or related to the

10   content of what the user requested.

Referring to Figs. 3A-3D, the page views displayed to
the user during the process of Fig. 2 will be described.
Figs. 3A-3D show four form views labeled successively Form#
YP_1, Form# YP_2, Form# YP_3, and Form# YP_4.   These form

15   views correspond to the references made to the same form
numbers in the flow chart of Fig. 2.

The user is first presented with a user's screen that
looks like Form# YP_1 and the user is prompted to type in a
query.   For example, the user can type in a query for car

20   dealers in Morristown, NJ.   This query will result in a
search type as previously described, either as a category
or a vendor.   In fact, the user can pick one or the other
by selecting the appropriate box on Form# YP_1.   At this
point, the system knows whether the search type is category

25   or vendor and, because the user has typed in car dealers,
the system knows the focus.

At this point, if the search type is vendor, the
system will show a screen that looks like Form# YP_2.   This
screen informs the user that it will take approximately 30

30   seconds for the system to respond to the user and asks the
user whether this is okay.   If the user wants to proceed,

the user clicks on the box labeled "Search it now" and the
system begins the search.

If the search type is category, the system displays a
screen that looks like Form# YP_3. This Form# YP_3 shows a

5   list of categories under the heading of car dealers. The
user is then asked to make a selection of one of these
categories. Simultaneously, the system goes into the ad
selection mode and selects and places ads on the Form# YP_3
that is being displayed to the user. In this case the

10   advertisement shown on Form# YP_3 is the Bellcore logo.

The user then selects one of the subcategories being
displayed and clicks on the box "Search it now."

The system next displays a screen that looks like
Form# YP_4. The ads placed on this Form# YP_4 have been

15   selected by the ad selector 34, and the listings on the
form have been searched and retrieved by the vendor DB
entries search engine 41.

In summary, the general process for a yellow page
search request in the system is that first the user states

20   a query, the result of the query is a set of possible
categories that the user wants to see. The system then
makes a choice of one category from this list of categories
and shows the relevant providers in that category to the
user. When the user states a query and the system displays

25   to the user a list of categories, certain advertisements
are shown to the user as well. This is the top half of the
flow chart of Fig. 2 where the category search engine 33 or
search time estimator 38 and the ad selector 34 provide the
two components to the mixer 35 and the mixer 35 comes up

30   with a page containing both an advertisement and a list of
categories or the search time estimation of how long it
will take.

If a user requested a category, the user will be shown advertisements and a list of categories that relate to the user's query. If the user requested a particular vendor, the user will be shown advertisements related to the focus

5   of the user's query and an estimation of how long it will take for the system to process the query. In both cases, the user has been shown advertisements and some part of the information and then asked to make a further choice. Once the user makes the further choice, the system again tries

10   to find what the user requested plus what advertisements to show as a part of this process. Thus, whenever the user asks the system to do something, the system will do what the user asks, but at the same time will find advertisements that it can mix in with what the user

15   requested.

Although the flow chart of Fig. 2 illustrates the present invention only in conjunction with a yellow page publisher, similar processes are used with other types of publishers. The process of the present invention for

20   placing ads with home page providers is described below in conjunction with the flow chart of Fig. 7.

Referring now to Fig. 4, the layout manager 10 of the present invention will be described in further detail. At step 50, the layout manager 10 is given the collection of

25   data to be displayed. The layout manager 10 has a collection of rules that it evaluates so that it can return the best layout for each page. When the layout manager 10 receives data it reads the parameters of the data for each rule (step 51) and expands on the expand meta template 53.

30   There are two main components of the layout manager 10, as previously discussed -- a layout data base and a layout rule base. The layout rules describe certain

parameters that can be used to determine the best layout to
use under a given set of situations. The layout data base
is a collection of templates that can be thought of as
forms that need to be filled out with certain kinds of
5   data.

When the layout manager 10 is given a piece of data,
it uses the rules to determine which templates to use.
Specifically, the layout manager 10 evaluates each and
every rule in its rule base to figure out which rule is the
10   best for a given piece of data. The rules are evaluated at
step 54 by calculating a meta and a target function cost.
The meta template is the template that describes what the
layout is about. For example, the template may provide
that there are only five places for advertisements in a
15   particular layout.

There is a cost associated with each kind of layout.
The basic problem that the layout manager 10 is faced with
is that are a certain number of advertisements to show and
there is a certain amount of user-requested data that has
20   to be shown. This creates a spectrum of objective versus
subjective content that has to be evaluated. That is, it
must be determined how much subjective content to provide
and how much objective content to provide. If the
publisher is a yellow page publisher, the layout manager 10
25   must decide how many telephone listings to display and how
much of the page to fill with advertisements. The system
could, for example, display only three telephone listings
and fill the rest of the page with advertisements, or the
system could display twenty telephone listings and only one
30   ad. Each template in the layout database has a set of meta
attributes associated therewith indicating the number of
advertisements that can be displayed, the amount of content

to be displayed, and the cost function associated with the template.

In summary, the layout manager 10 picks up a rule in the data base, calculates the cost function for each

5   template and stores the template with the minimum cost in a safe place (step 55). At the end of this computation the layout manager 10 succeeds in finding the minimum cost layout within its data base that it can use for the current data account. It then picks the minimum cost layout as the

10   best layout and returns the best layout (step 52) to the typography manager 14 for display to the user.

Referring to Fig. 5, a flow chart of a parser 60 of the present invention will be described. The purpose of the parser 60 is to interpret the meta comments and meta

15   tags inserted on the publishers' pages. As described above, these are generally pages constructed by magazine or newspaper publishers that have provided special tags in their content for the present system to interpret in a special way. These pages are referred to in Fig. 5 as

20   enhanced HTML or E_HTML 61.

The parser 60 first searches for special tags (step 62) in the input E_HTML. There are two kinds of special tags: tags for focus and tags for advertisement space. Tags for focus are tags that tell the system what the focus

25   of the page is or what the context or content of the page is about. For example, a focus tag might indicate that the page is about sports cars, cooking, or travel destinations in the Caribbean. The advertisement space tags, on the other hand, indicate a space on the page that is so many

30   pixels by so many pixels and that can be used for advertisements. The parser 60 searches for these special tags and identifies the tag name as either a focus or an

- 31 -

advertisement tag (step 63). If the parser 60 cannot find any special tags, it simply returns from where it was called.

If the parser 60 finds a focus kind of tag, it
5   extracts and stores the focus words (step 64). If the parser 60 finds an advertisement kind of tag, it extracts and stores the size value (step 65). In both cases, the process returns the focus and ads information to another module in the system (step 67) after reaching the end of
10   the page (EOF) 66.

Referring to Fig. 6, a process flow of the mixer and ad selector will be described. The purpose of the mixer 35 (as previously described in reference to Fig. 2) is to take publishers' content and advertisements and combine them
15   together so that the content and the advertisements are mixed on the same page.

In Fig. 6, the mixer 35 is shown receiving two inputs from the publishers: data 50 (which is the content) and E-HTML 61 (which contains the special tags). The layout
20   manager 10 and parser 60 both form a part of the mixer 35. The data 50 is input to the layout manager 10, and the E_HTML 61 is input to the E_HTML parser 60, as previously discussed. Both of these sub-modules then determine where the advertisements can be placed on the publisher's page.

25   The advertisement list is then input from the ad selector 34. The ad selector 34 receives a focus input 43, retrieves relevant ads (step 70), and creates the advertisement list using the prime space manager 20 (step 71). These advertisements are then placed in the parser 60
30   and the layout manager 10 (step 72), as described above. The mixer 35 then logs all the essential billing and other user information (step 73) for keeping track of the

system's placement of an advertiser's ad. At this point, a
refresh tag is inserted (step 74) and the system outputs an
HTML page (step 75).

5   The HTML page output from the mixer 35 has no special
tags and can be displayed by any client that can understand
HTML. The E_HTML 61 is peculiar to the present invention.
The HTML 75 is the standard HTML used on computer
networks. The E_HTML 61 is peculiar in the sense that it
has the special tags for advertisements and focus, as
10   discussed above.

         The refresh tag inserted at step 74 is a special tag
inserted into every page that is to be displayed. The
purpose of this tag is to refresh the page if the user does
not take any action for a predetermined period of time.
15   The system will refresh and show a new advertisement in the
ad space, while leaving the rest of the page the same.
Thus, while the user is viewing the page, the system will
not show the same advertisements for more than a
predetermined period of time so as to take advantage of the
20   user's limited attention span. This permits the system to
effectively run as many ads as possible.

         For example, while a user is reading an online
magazine page, the advertisement may change every so often
as the user is viewing the same page. If the user is
25   making changes to the page or is going back and forth on
the page, then the advertisements will not be changed by
the refresh tag function. The timer for the refresh tag
function can be specified by the advertiser or determined
by the system.

30   As described above, there are five basic types of
contracts supported by this system. One type of contract,
the ratio-based contract, requires that a certain

advertisement has to be shown on the first screen of
information or the prime space screen of information for a
certain percentage of the time. In order to satisfy this
contract, the system has to be able to refresh the prime
5   space screen. Otherwise, once an advertisement was placed
on a user's screen it would remain on the screen the entire
time that the user is viewing the screen. The insert
refresh tag function 74 ensures that the user will be shown
new advertisements and not be subjected to the same
10   advertisement for any great length of time.

Referring to Fig. 7, a flow chart of the present
invention as used with a home page provider will be
described. The flow chart of Fig. 7 is somewhat similar to
the flow chart of Fig. 2. However, while the flow chart of
15   Fig. 2 shows the process used with yellow page publishers,
the flow chart of Fig. 7 shows the process used with home
page provider publishers. As described above, home page
providers are publishers that have provided special tags
and special focus and advertisement space tags in the meta
20   content supplied to the present system.

To start (step 80), the user enters a query. For
example, the user may enter restaurants or cars as a query.
The query has a focus, as described above. The system
determines what the focus is and, as described above, the
25   system provides the user with a list of categories that
relate to the query. For example, if the user requests
restaurants, the user might be shown a list of restaurant
types, such as Chinese, American, French, Italian, and so
forth. The query entered by the user is evaluated by a
30   query form manager (step 81) to determine the focus of the
query.

The screen ("Form# 1") illustrated in Fig. 8A is the graphical interface used to enter the query. Form# 1 shows the space (immediately following the phrase "SEARCH FOR") where the user types in the query (in this case "car").

5   The result of the query is a list of relevant subcategories for cars, as shown in Fig. 8B ("Form# 2").

Referring again to Fig. 7, the category search engine 33 generates a number of subcategories of the query (e.g., cars), and the ad selector 34 (Fig. 7) finds certain

10   advertisements that are related to cars. The mixer 35 mixes these two screens to create the display shown as Form# 2 in Fig. 8B (step 82).

At this point (step 82) the user is asked to make a further selection. That is, the user is asked to pick one

15   or more of the categories displayed in Form# 2 so that the system will provide more specific information. The user may pick, for example, "new and used car dealers retail" by highlighting that item and clicking on the submit button. Upon clicking the submit button, the content provider

20   search engine 83 is accessed. At the same time the ad selector 34 is directed to find appropriate advertisements for the category "new and used car dealers retail."

The content provider search engine 83 and the ad selector 34 then return their respective outputs to the

25   mixer 35. The mixer 35 then mixes the outputs and produces a list of matching content providers plus the advertisements (step 84). The combined display at this point is shown as Form# 3 in Fig. 8C. Form# 3 shows a list of different car dealers in the center of the display, and

30   five advertisements along both sides of the display.

The user is then further asked to make a selection of a particular dealer (e.g., a Mazda 626 dealer or a Ford

Mustang dealer) that the user wants to visit. The user
makes the choice, and the choice of the user is given to
the content provider dispatcher 85 and the ad selector 34.
As the content provider dispatcher 85 is retrieving the
5   requested home page, the ad selector 34 again finds an
appropriate advertisement based on the user's request.

For example, the user can pick a Mazda 626 dealer by
clicking on Mazda 626. As the page for a Mazda 626 dealer
is being retrieved, the ad selector 34 finds advertisements
10   that can be inserted on this page. There may or may not be
advertising space on the home page for the Mazda 626
dealer.

If there are no spaces on the home page for the system to
place ads, the system will either insert the ads before or
15   after the page, or the system may decide not to place any
advertisements at all. In any case, for any home pages
requested, the ad selector 34 will attempt to find suitable
advertisements and give these ads to the mixer 35, and the
mixer 35 at that point will display the content provider's
20   home page with or without ads.

In summary, Figs. 8A-8C show three screen displays
referred to in Fig. 7 as Form# 1, Form# 2 and Form# 3,
respectively. Form# 1 is the first screen that the user
sees and in which the user is expected to type in a general
25   query in the typeable space. This results in a second
screen (Form# 2) where the user is asked to make a choice
from a list of categories. After choosing from the list of
categories in the second screen, a third screen (Form# 3)
is shown to the user from which the user makes a choice
30   from a list of subcategories. The present invention uses
these three screens also to show ads related to the user's
requests. Form# 1 shows two ads for the owner of the

- 36 -

service provider (e.g., Bellcore in this case). Form# 2
shows advertisements related to cars because the user typed
in cars. Form# 3 shows more car advertisements relating to
particular makes of cars because the user asked for retail

5   car dealers.

Referring to Figs. 9A and 9B, a description of the
billing system of the present invention will be provided.
Figs. 9A and 9B show two submodules of the system called
the info bank and ad auditing. The purpose of these two

10   modules is to construct log reports of various usages of
the present invention.

Fig. 9A shows the process flow for the info bank
submodule 90. The purpose of the info bank submodule 90 is
to log certain kinds of information during a particular

15   client's session. The logged information is then used to
provide advertisers with a description of what
advertisements have been shown, what the user has bought
after seeing an ad, and so forth. Thus, the info bank
submodule provides an information bank to show advertisers

20   who has been accessing the system and how successful the
ads have been.

The screen for the relevant module contains a link
called the info bank which the user can select. When the
user clicks on the info bank link, the user is shown the

25   start 91 of the info bank submodule. At this point the
user is asked for authentication information (step 92),
such as the user's name and personal identification number
(PIN). The system then goes into the authentication mode
93 and verifies whether the user ID and PIN number typed in

30   are valid. If the authentication is successful, the system
then searches the transaction log and filter (step 94) and
pulls up the appropriate log requested by the user. The

user can ask to see all transactions performed by the
client or all of the things of a certain type that the user
has bought. A report of the results (step 95) is
automatically produced for the client and displayed.

5   The submodule for ad auditing 96 has a similar purpose
to the info bank submodule. With the ad auditor, an
advertiser that has placed an advertisement with the system
is able to go into the system at any point in time and find
out who has seen his ad, what was the content of the query
10   when the advertisement was displayed, how many times has
the advertisement been displayed, and so forth. The
authentication and other process steps are similar to the
corresponding steps of the info bank submodule 90.

More specifically, in order to use the ad auditing
15   submodule 96 the advertiser is shown a screen with a link
for ad auditing. The user clicks on the ad auditing link
and is led into the start 97 of the ad auditing module.
The advertiser is then asked to type in authentication
information (step 98), which consists of the user name
20   followed by a PIN number. If the PIN and the user name
check out and are authenticated by the authentication step
99, the user is then asked to tell the system which
advertisement or which subset of advertisements they want
to verify or audit (step 100). Once the user specifies the
25   advertisement by name or by browsing all the advertisements
in the system and clicking on the ones that the user wants
to get a report on, the system generates a report (step
101), which is a log of who has seen the ad, what machine
they were using, what time and for how long the
30   advertisement was displayed, and other desired information.

All the log information accessed by the info bank and
ad auditing submodules is logged in a single database 23

- 38 -

(Fig. 1). Whether the user is looking for auditing information, transactions, things that the user has bought, or user demographics, the information is all in the same database. However, when a user uses the info bank

5   submodule 90, the user is interested in only certain things, as described above. But when the user uses the ad auditing submodule 96, the user is interested in other things. Therefore, the reports that are produced by the info bank and ad auditing submodules contain different

10   data. The database is filtered and only the items of interest for a certain report are retained so that the rest of the database need not be used.

Referring to Fig. 10, the flow of an ad placement process 110 according to the present invention will be

15   described. The purpose of ad placement is to allow advertisers to enter their advertisements into the system. For entering an ad, the system provides a screen that is shown to the user asking whether the user wants to enter an ad. If the user indicates yes by clicking on that

20   particular choice, the system enters the start 111 of the ad placement mode. At this point the system asks the user for the focus (step 112). The advertiser may say, for example, that he is in the car business, the car washing business, or that he is a physician, a lawyer or whatever

25   other category name that he wants to give. The user is also asked for an advertisement name at step 112. This is just a name for future reference.

The purpose of the focus in step 112, as discussed above, is to prevent an advertisement from being shown that

30   is not relevant to the query at hand. The system of the present invention always shows advertisements that are relevant to what the user has asked for. Therefore, it is

- 39 -

of paramount importance that the system know the context of the ad. Thus, when the advertiser places an ad, the system establishes the focus.

The present invention describes the world in terms of
5   SIC codes, which is a categorization of approximately 64,000 categories. For example, the system knows that there is a distinction between opera glasses and operating tables. It knows a distinction between lawyers and physicians, as well as the distinction between different
10 kinds of physicians. For example, when the user types in bicycle as the focus, the present invention accesses the category search engine 33 and returns a list of subcategories related to the bicycle business (e.g., bicycle repair, bicycle sales, bicycling as a sport, and so
15 forth). The user is prompted (step 114) to select one or more of the subcategories from the list that are relevant to the user's ad. The user can also create his or her own categories at this point. The result is that the advertisement is tied to all of the categories selected or
20 created by the user.

The user may also be asked to provide certain demographic or profile information. For instance, the user can require that his advertisement be shown only to people in age group 30 to 40 or only to people living in
25 Morristown, NJ or any other geographic location. The last item that the user is asked to specify is the contract. The various contracts available to the advertiser are explained above. When the user is finished entering all of this information, the system updates the ad info database
30 (step 115).

The system then either accepts the advertisement (step 116), or the system rejects it. The system might reject

the advertisement because the contract that the user wants

cannot be satisfied by the system. If the system decides

at this point that the user's contract cannot be satisfied,

the system displays to the user the next best possible

5   contract that it can satisfy, and the user is then free to

either choose that contract or to suggest a different one

for consideration by the system. Upon confirmation of the

ad placement, the advertisement becomes a part of the

database.

10   Referring to Fig. 11, the flow of a page placement

process 120 according to the present invention will be

described. The purpose of the page placement process is

similar to the ad placement process described above with

reference to Fig. 10. The page placement process 120 is

15   distinct from the case where the page resides outside of

the present system, either as a part of a search engine or

because somebody else owns the home page. The page

placement process is used for publishers interested in

creating a home page for use in the present system. The

20   page placement process permits publishers to provide a page

with meta tags and meta contacts.

The page placement process has a starting screen 121

in which one of the menu choices is, "Would you like to

place a page?" If the user clicks on that menu choice, a

25   screen is shown to the user asking the user to type in a

page name, a page URL (i.e., Universal Resource Locator),

and a focus. The URL is a physical address in terms of the

WWW of where the page is actually residing. As discussed

above, the focus is a list of key words that the user

30   believes captures the content of the page.

Upon entry of the focus, page name, and page URL, the

system retrieves a list of subcategories from the category

search engine 33 that are related to the focus at hand and displays those subcategories to the user (step 124). The user picks one or more of these subcategories as being relevant to the content of the page. The system is then

5   able to integrate the page into the page database of the present invention (step 125) and return a confirmation of the new home page being linked to the relevant categories (step 126).

Referring to Fig. 12, an architecture of the

10   underlying transaction system of the present invention will be described. One of the basic features of the present invention is that the advertisements displayed to users provide a gateway for the client to take further action with the advertiser. That is, the ads are not just there

15   for the user to see, they are interactive.

For example, if the system shows the user a picture of a car or a cookie and the user wants to buy or receive further information about the advertised product, the user can make a transaction with the system. The transaction

20   can be very simple, such as where the user clicks on the advertisement and is displayed all information about that particular product. Or the transaction could be something more complicated, such as where the user actually enters a dialogue with the system and buys the product.

25   The flow chart shown in Fig. 12 describes a typical scenario in which the client has seen a certain advertisement and clicks on that advertisement to actually buy something. In particular, whatever this person is going to buy is going to involve multiple servers. The

30   client is running on Host 1, and the transaction that the client is requesting will involve multiple servers, perhaps geographically distributed. Host 4 is a bank server

- 42 -

running at a bank somewhere on the computer network. Host
3 is a transaction server for logging and serving as the
transaction focal point. Host 2 is a server that accepts
the start of the transaction from the client housed at Host

5   1.

A typical transaction where the client 130 sees an
advertisement and clicks on the advertisement will now be
described by reference to the transaction system
architecture diagram shown in Fig. 12 and the screen

10   displays shown in Figs. 13A and 13B. The action of
clicking on the advertisement is captured by the gate 131
in Host 2, and the appropriate information is then
displayed to the client by the transaction client 132 in
Host 2. For example, the transaction client 132 might

15   prompt the client to enter the type of transaction desired.
The transaction client in Host 2 is a client for a
transaction server 133 in Host 3.

Referring to Figs. 13A and 13B, in the typical
transaction the user first clicks on an item from a list of

20   features offered by the particular publisher (Fig. 13A), in
this case, the item "Internet DMV." A second screen
display (Fig. 13B) then appears in which an advertisement
is provided in the middle of the page that says "Division
of Motor Vehicles, Morristown, New Jersey, Automatic

25   Renewal of Driving License." The user may then click on
this particular advertisement. At this point a screen is
displayed to the user asking the user what type of
transaction the user wants to make. The next screen
generated by the transaction client at Host 2 would say,

30   for example, "Would you like to renew your license?" or
"Would you like to get a new car registration?" If the
user says, "I would like to renew my driver's license," the

- 43 -

request is captured by the transaction client 132 at Host 2
and given to the transaction server 133 in Host 3. The
transaction server 133 in Host 3 then receives this request
for renewal of driving license, extracts the appropriate

5   forms to be filled out from its local database, and
provides the forms to the transaction client 132 in Host 2.
The transaction client 132 at Host 2 then receives these
forms and fills them out with the client's information with
help from the client 130 at Host 1. Thus, the client's

10 name, address, car ID and other necessary information are
filled in for the client automatically.

The client 130 is asked to type in a PIN number to
start the second part of the transaction. If the client
130 types in the PIN number, the second part of the

15 transaction starts. The second part of the transaction is
that the form that has now been filled in and constitutes
the request for a renewal of driver's license is sent from
the client 130 in Host 1 to the transaction client 132 in
Host 2, and from the transaction client 132 in Host 2 to

20 the transaction server 133 in Host 3. At this point, there
are two things that have to happen at Host 3. First, the
particular request for renewal of the driving license has
to be processed by making a record that this person has
renewed the license and by sending confirmation back to the

25 client. Second, the transaction server 133 must be paid
for the renewal of the driving license. In other words,
there has to be a monetary fee that has to be exchanged
between the client and the DMV.

In exchanging the monetary fee, the transaction server

30 133 will also act as a transaction client 134 to the bank
server 135 in Host 4. The transaction client 134 sends a
message to the bank server 135 in Host 4 indicating that it

- 44 -

has the client's PIN number and the authorization to deduct
a certain fee from the client's account. The bank server
135 authenticates that information, logs the information in
its own records, and sends back an electronic approval for

5   the debit.

The transaction client 134 at that point indicates
receipt of the payment to the transaction server 133 in
Host 3. The transaction server 133 in Host 3 logs receipt
of the money, receipt of the request, and sends a

10 confirmation message through the transaction client 132 and
gate 131 back to the client 130 at Host 1. The
confirmation might say, for example, "We have received your
request; we have deducted $17 from your account; your
license is in the mail; here is your new driving license

15 number; thank you very much."

Referring to Fig. 14, the transaction process of the
present invention will now be described by reference to a
flow chart. The user starts the process (step 140) by
clicking on an appropriate advertisement to ask for a

20 transaction. The system then links the user (step 141) to
the transaction server (step 142). The transaction server
then returns the required form to the client (step 143),
and the client fills in the form with the user's profile
information. The form is then resubmitted to the

25 transaction server (step 144). The transaction server
accesses the bank server (step 145) to determine whether
the user has the required money and whether the money can
be withdrawn.

Upon authentication by the bank server, the

30 transaction server receives confirmation from the bank
server (step 146) that the user has given a valid account
number, and that the bank server has in fact authenticated

- 45 -

the user and has authenticated the deduction of the
appropriate sums from the bank. The transaction server
then makes the deduction and puts the deducted amount into
the bank server's log (step 147). These logs are

5   maintained so that at any time users can find out how much
money they have spent or who has bought what things. The
transaction server also maintains a transaction server log
of the transaction time and any other particulars of the
transaction desired (step 148). Once the logging is

10   complete, the transaction server then generates a
confirmation of the transaction which is then displayed to
the client (step 149).

       Referring to Fig. 15, the prime space manager 20 will
now be described in further detail. As explained above, an

15   important feature of the present invention is that it
offers advertisers certain contractual guarantees as to how
and when their ads will be shown in prime space (the first
screen of information displayed to the user). These
contractual guarantees include frequency-based contracts,

20   ratio or percentage-based contracts, exclusive or
competitive contracts, dependent contracts, and story
contracts. These contracts can be used alone or combined
in a variety of ways, as previously explained.

       The prime space manager 20 has a prime space algorithm

25   150 that accepts as inputs the list of relevant ads that
are related to the query at hand, the size of the prime
space, and the list of all ad contracts. The prime space
manager 20 then looks at all the ad contracts and
determines which advertisements to show to the user. The

30   prime space manager 20 then updates the contracts (step
151) to indicate which ads were selected (this information
is used in considering which ads to select the next time).

The prime space manager 20 then provides a list of prime space ads to be shown to the appropriate module. That is, the prime space manager 20 accepts a possibly very long list of advertisements and, based on the contracts that it

5   has, filters the ads to a smaller list containing exactly the number of advertisements that it can show based on the size of prime space.

The following examples of prime space algorithms are provided to further illustrate the function and operation

10   of the prime space manager 20 of the present invention. It should be noted that many variations of these algorithms are possible, and that the specific examples provided are for purposes of illustration only.

15   **Notations:**

Let $A_1.....A_n$ denote the advertisements in the system of the present invention.

Let $P_1.....P_n$ denote the contract values associated with the corresponding advertisements (P_i denotes the

20   contract value associated with advertisement A_i, as a function of the price paid by the advertiser.)

Let S denote the size of the prime space in the system.

Prime Space:

The prime space on a user's terminal means the first
screen of data which constitutes the answer to the user's
query (plus the relevant advertisements). In this context,
5   advertisers will be assured of "fair" treatment in the
sense that their advertisements will be presented to the
targeted users in a manner that is commensurate with the
fees they were charged. Fairness means equal access as
well as controlled access--ensuring that advertisers who
10   pay more are more accessible than those who pay less.

Contracts:

Contracts are specifications that indicate the
frequency of display of a given advertisement in response
15   to relevant user queries.

The example prime space algorithms provided below may
be used for the following four types of advertisement
contracts:

1.   Frequency-based: These contracts specify the
20   number of times a given advertisement is to be shown
in response to the relevant user queries.

2.   Ratio-based: These contracts specify how often a
given advertisement is to be shown in the prime space
25   in response to the relevant user queries.

3.   Dependent: An ad A_i can have a dependent contract
of X% with another ad A_j. The dependent contract will
ensure that ad A_i is shown together with A_j at least X%
30   of the times ad A_j will be shown.

- 48 -

4.   Exclusive: An ad A_i can have an exclusive contract with another ad A_j.   The exclusive contract will ensure that ad A_i will not be displayed along with ad A_j.

5   **Algorithm for Frequency-based Contracts:**
WHILE (screen space is not filled)
begin

    1.   Select an advertisement, say A_i, with the
         selection biased by the contract value P_i

10   2.   Include A_i in the screen space
end

Algorithm for Ratio-based Contracts:
WHILE (prime space is not filled)
15   begin

    1.   Select an advertisement, say A_i, with the
         selection biased by the contract value P_i

    2.   Include A_i in the prime space
end

20

Algorithm for Dependent Contracts:
WHILE (Prime space is not filled)
begin

    1.   Select an advertisement, say A_i, with the
25   selection biased by the contract value P_i

    2.   Assign A_i to A

    3.   WHILE (some advertisement is selected AND prime
         space is not filled)

         -      Select one of the dependents of A, say A_j,
30   with the selection biased by the contract
                value P_j

- 49 -

- Assign A_j to A

- Include A in the prime space

end

Algorithm for Exclusive Contracts:

WHILE (prime space is not filled)

begin

    1.   Select an advertisement, say A_i, with the selection biased by the contract value P_i

    2.   Remove all advertisements A_j's that have an exclusive contract on A_i

    3.   Remove all advertisements A_k's that A_i has an exclusive contract on

    4.   Include A_i in the prime space

end

Algorithm for Overall Prime Space Management:

WHILE (prime space is not filled)

begin

    1.   Select an advertisement, say A_1, with the selection biased by the contract value P_i

    2.   Assign A_i to A

    3.   WHILE (some advertisement is selected AND prime space is not filled)

        -   Remove all advertisements A_j's that have an exclusive contract on A

        -   Remove all advertisements A_k's that A has an exclusive contract with

        -   Select one of the dependents of A, say A_m, with the selection biased by the contract value P_m

-       Assign A_m to A

-       Include A in the prime space

end

5   **Algorithm for Checking Consistency:**

Notations:

Let P_A denote the prime space contract value of Node A.

Let $D(A,B,X)$ denote the dependency contract value from

advertisement A to advertisement B (A should appear

10 together with advertisement B, X% of the times

advertisement B appears).

Let $E(A,B)$ denote the exclusive contract from

advertisement A to advertisement B (note that no value is

associated with exclusive contracts).

15   If a new advertisement A is to be introduced into the

system with a prime space contract value of P_A, a set of

dependency contracts $D(A,1,x),...,D(A,k,y)$ and a set of

exclusive contracts $E(A,1),...,E(A,q)$, then for checking

the consistency of all the contracts, the following basic

20 checks have to be carried out (more specific checks may be

required for specific algorithms and their

implementations):

        1.   Check whether Inequality (I) can be satisfied

        2.   For each of the dependency contracts $D(A,i,x)$

25   check whether Inequality (II) can be satisfied

        3.   For each of the exclusive contracts $E(A,i)$ check

              whether conditions (III) can be satisfied

The consistency checking algorithm verifies if the new

advertisement can be accommodated with the corresponding

30 contract. If the new advertisement can be accommodated,

the contract is approved and the system is updated to

reflect the new addition, else, the consistency checking
algorithm informs the advertiser of the maximal contract
that can be accommodated for the new advertisement.

Install Equation Editor and double-
click here to view equation.

Install Equation Editor and double-
click here to view equation.

5   For checking the Dependency Contracts and the
Exclusive Contracts a graph is drawn by representing all
the advertisements as nodes in a directed graph. A
dependency contract "Advertisement C appears 50% of the
times as advertisement D appears (together)" is represented
as an edge from the node "C" to the node "D". A weight of
10   0.5 is assigned to this edge. For each exclusive contract
$E(C,D)$, there exists an edge in the graph. Thus, a graph
is formed where the nodes denote the advertisements, and
the edges denote the dependency and exclusive contracts.

        If a new dependency contract $D(A,B,X)$ is to be
15   introduced, then the following check has to be made for
consistency:

Install Equation Editor and double-
click here to view equation.

        If a new exclusive contract $E(A,B)$ is to be
introduced, the following conditions (III) should hold (for
20   any value of x):

Install Equation Editor and double-
click here to view equation.

where $X_{(A,B)}$ denotes the weight of the dependency edge from A
to B, i.e., $D(A,B,X_{(A,B)})$.

Fairness:

The fairness guarantees of an algorithm for the system ensures that the advertisements are displayed in a way that is proportional to the fee charged for that

5   advertisement. The fairness of the frequency-based contract algorithm, ratio-based contract algorithm, and the dependent contract algorithm follows from the probability distribution of the contract values and the random number generator that selects an advertisement with the correct

10   random bias. The probability that the random number generator will generate a number in a particular range is proportional to the length of the range. The larger the range, the more probable that a number corresponding to that range will be selected. Each advertisement is

15   assigned a range of values depending on the fee charged for that advertisement. The more the fee charged, the greater the range assigned to that advertisement. This ensures that the larger the fee, the more frequently (more number of times) that advertisement will be displayed.

20   Exclusive contracts are constraints imposed on the display of advertisements. Fairness in meeting the exclusive contracts means that the contracts are satisfied (no two advertisements that have an exclusive contract are displayed together). The prime space management algorithm

25   150 ensures that the exclusive contracts are met, by removing all the advertisements that have a relative contract with an advertisement A, as soon as advertisement A is selected for display in the prime space.

In order to ensure fairness, the contracts have to be

30   consistent. When contracts are negotiated with the advertiser, certain consistency checks (using the

consistency checking algorithm) are made in order to ensure
that the fairness guarantees can in fact be met.

Story Advertisements:

5   Story advertisement is a kind of advertisement in
which the advertisement changes dynamically as time
progresses. The story advertisement is composed of a
sequence of static conventional advertisements, which
together tell a story. A story advertisement is displayed

10   using the notion of refresh-insert tags. A refresh tag
that is associated with a page denotes the time period
after which the story advertisements are refreshed (the
next advertisement in the sequence is displayed). All
other static advertisements are unaffected by the refresh

15   timer. The refresh tag can be set by the client or the
application. Thus, the story advertisement is a logical
sequence of a number of advertisements, that will be
displayed one at a time at each refresh cycle.

It will be appreciated that the present invention is

20   not limited to the exact construction or process steps that
have been described above and illustrated in the
accompanying drawings, and that various modifications and
changes can be made without departing from the scope
thereof. It is intended that the scope of the invention

25   only be limited by the appended claims.

WHAT IS CLAIMED IS:

1.   A system for advertising on a computer network, comprising:

a server containing a plurality of advertisements;

5   means for electronically connecting the server to a computer network; and

means for selecting and retrieving an advertisement from said server in response to a query entered on said network.

10

2.   The system for advertising as set forth in claim 1, wherein said selecting means comprises means for ensuring that a selected advertisement is relevant to the query.

15

3.   The system for advertising as set forth in claim 1, further comprising a mixer means for combining a retrieved advertisement with a content page returned by the computer network in response to the query.

20

4.   The system for advertising as set forth in claim 1, further comprising a prime space manager means for controlling when the advertisements contained on said server are selected by said selecting means, said control

25   being based upon respective advertiser contracts associated with each of said advertisements.

5.   The system for advertising as set forth in claim 1, further comprising a local client means for displaying a

30   retrieved advertisement only during a download delay time period in which a user is waiting for a content page to be downloaded in response to the query.

- 56 -

6.   The system for advertising as set forth in claim
1, further comprising means for calculating a search time
estimation for the query, and means for combining a page
5   containing said search time estimation and a retrieved
advertisement.

7.   The system for advertising as set forth in claim
1, further comprising means for determining a geographic
10   location of a user that entered the query, and means for
selecting an advertisement based upon the user's geographic
location.
8.   A method for advertising on a computer network,
comprising the steps of:
15   placing a plurality of advertisements on a server;
placing the server in electronic communication with a
computer network;
selecting an advertisement on said server in response
to a query entered on said network; and
20   retrieving the selected advertisement from said server
for display to a user.
9.   The method for advertising as set forth in claim
24, further comprising the step of combining the retrieved
advertisement with a content page returned by the computer
25   network in response to the query.

10.   The method for advertising as set forth in claim
24, further comprising the step of controlling when the
advertisements on the server are selected based upon
30   respective advertiser contracts associated with each of the
advertisements.

11.   The method for advertising as set forth in claim
24, further comprising the step of displaying the retrieved
advertisement only during a download delay time period in
which a user is waiting for a content page to be downloaded
5   in response to the query.

FIG. 1
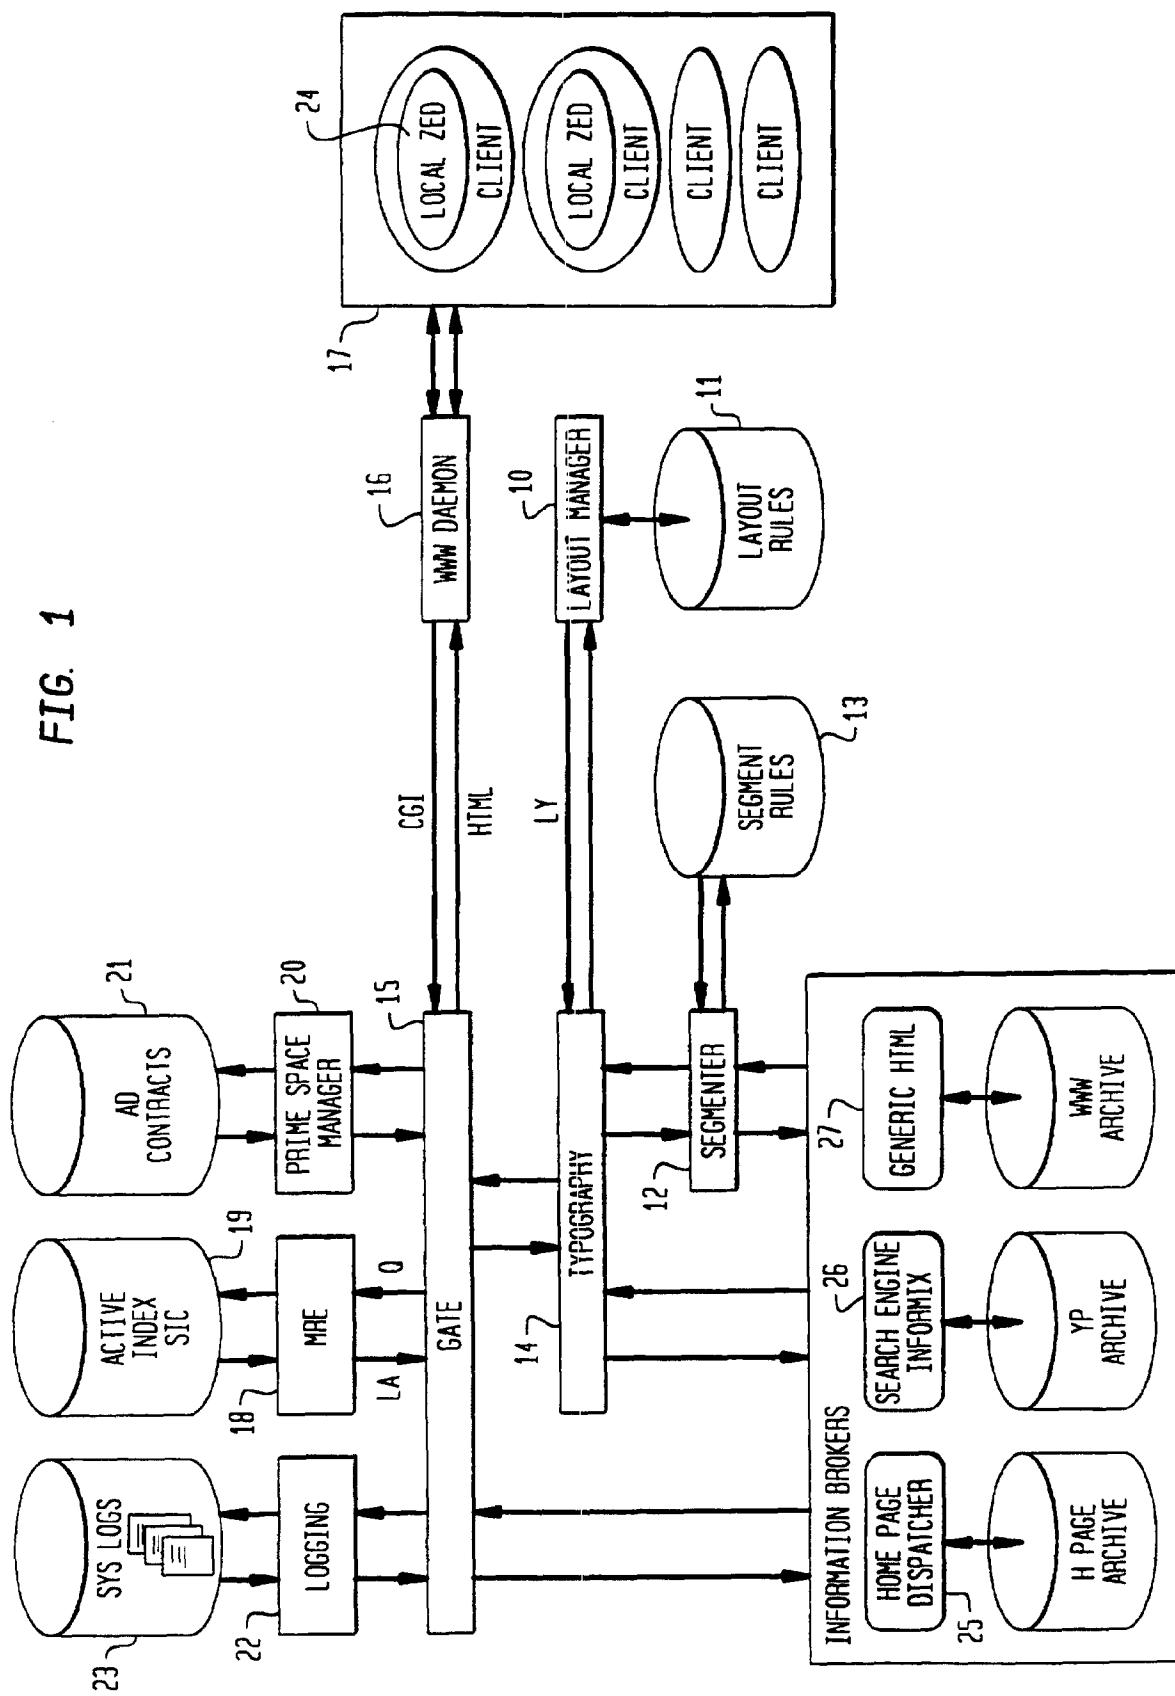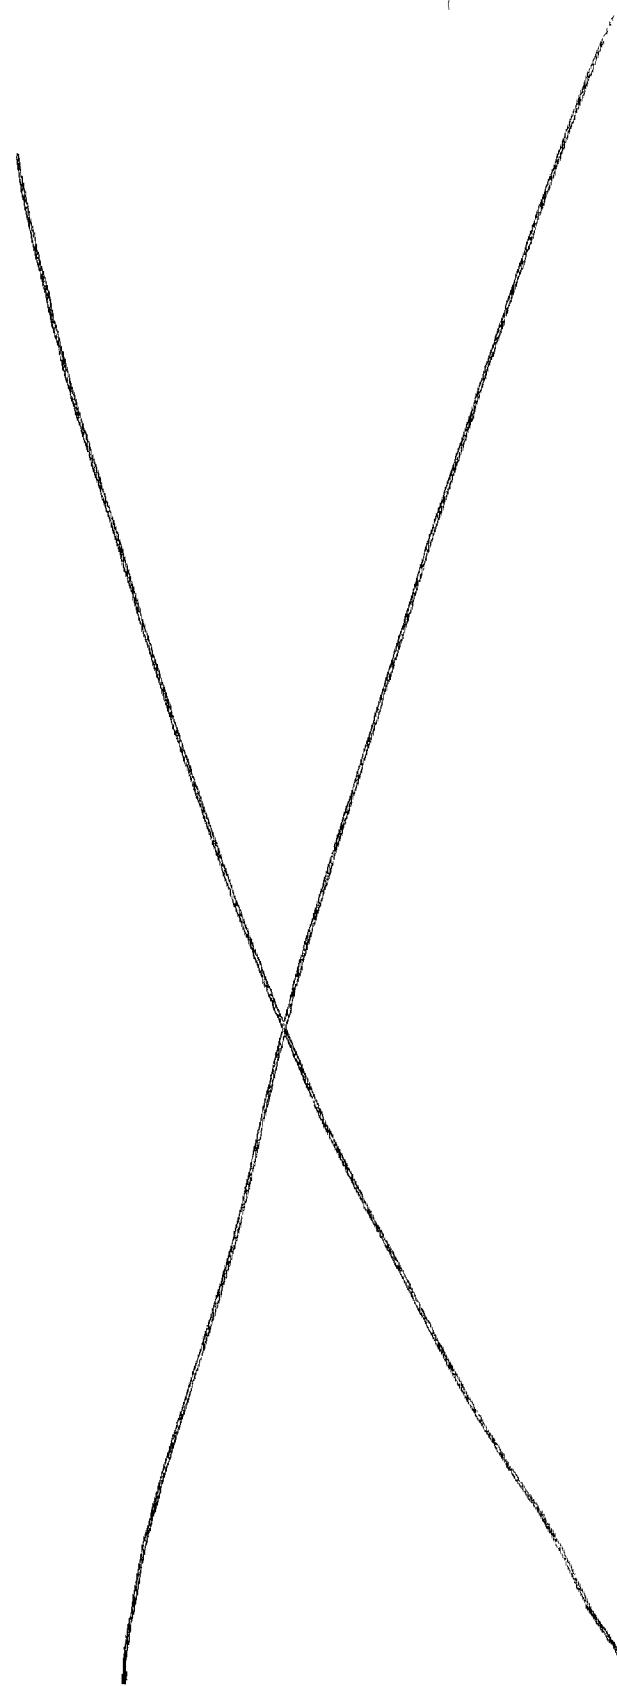
FIG. 2
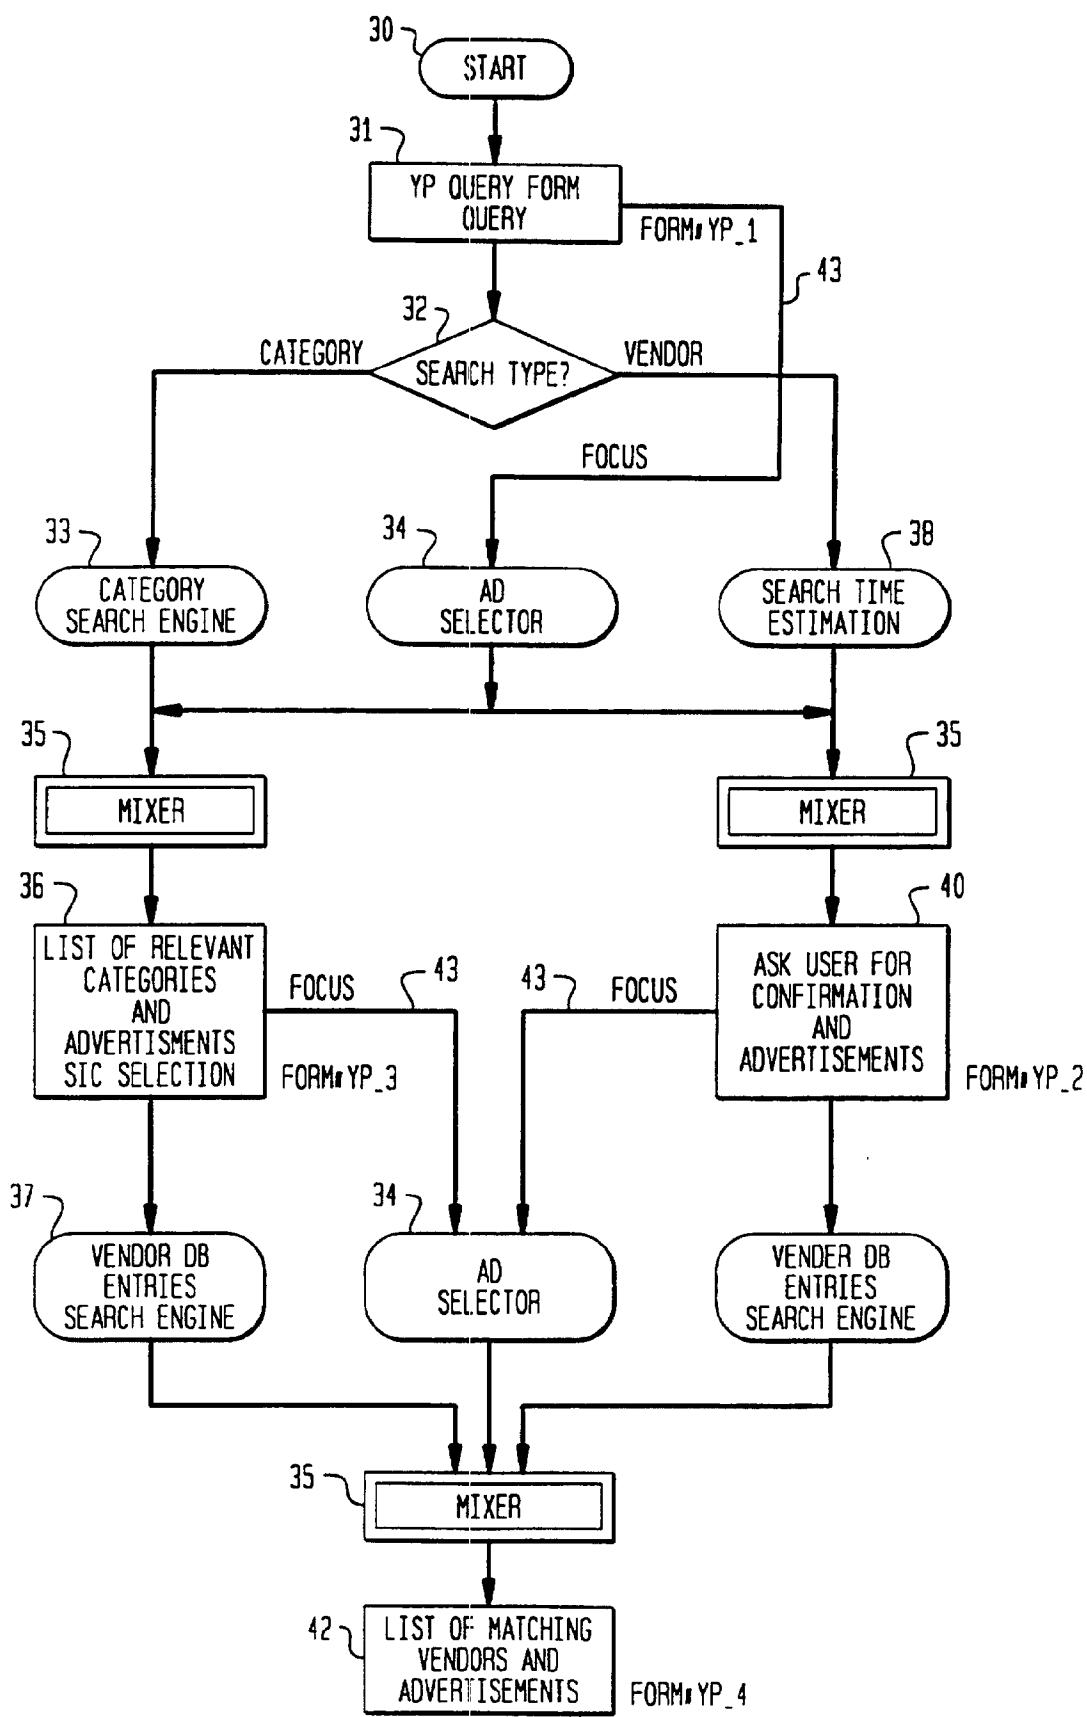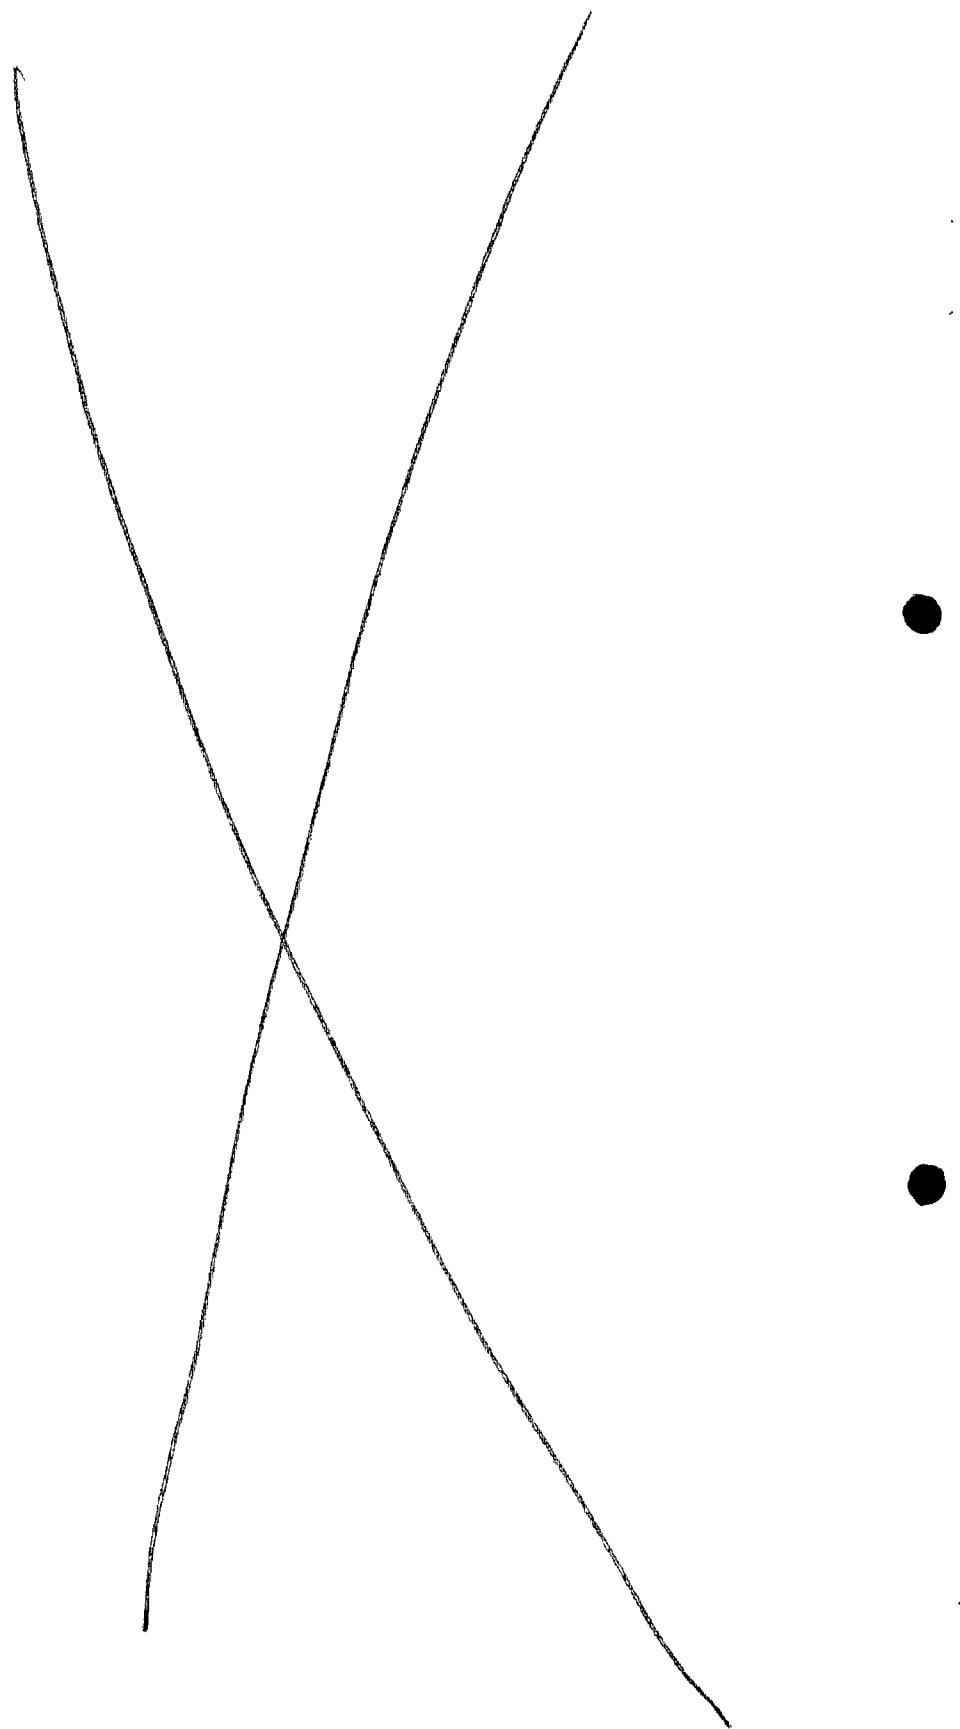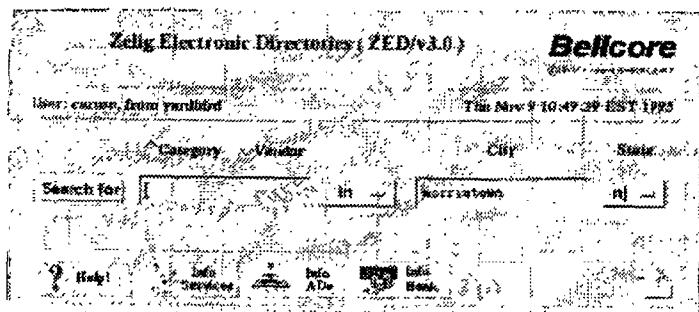
FIG. 3A
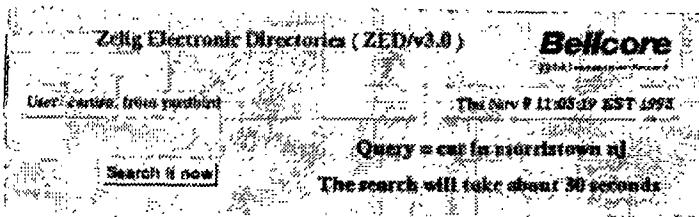
FORM# YP_1

FIG. 3B

FORM# YP_2
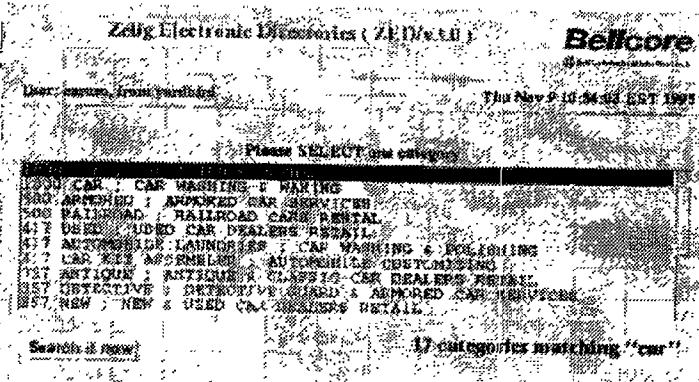
FIG. 3C

FORM# YP_3

FIG. 3D

FORM# YP_4

FIG. 4

DATA 50

LAYOUT MANAGER 10

FOR EACH RULE 51

RETURN BEST LAYOUT 52

EXPAND META TEMPLATE 53

EVALUATE TARGET FUNCTION 54

STORE MIN INTO BEST LAYOUT 55

FIG. 5

60

61
E_HTML

62
SEARCH FOR SPECIAL TAGS

63
IDENTIFY
TAG NAME

FOCUS

AD

ELSE

64
EXTRACT AND STORE
FOCUS WORDS

65
EXTRACT AND STORE
SIZE VALUE

66
EOF

67
RETURN FOCUS AND ADS INFORMATION

FIG. 6

FIG. 7

```
                        80 ──┤  START  )
                                 │
                                 ▼
          81 ──┤  QUERY FORM
                   FOCUS           FORM#1
                 ┌───────┴───────┐
                 ▼               ▼
   33 ──┤  CATEGORY              AD  ├── 34
          SEARCH ENGINE        SELECTOR
                 └───────┬───────┘
                         ▼
              35 ──┤ MIXER │
                         │
                         ▼
   82 ──┤  LIST OF RELEVANT ENTRIES
             AND ADVERTISEMENTS
                 SELECTION           FORM#2
                 ┌───────┴───────┐
                 ▼               ▼
   83 ──┤  CONTENT PROVIDER        AD  ├── 34
          SEARCH ENGINE          SELECTOR
                 └───────┬───────┘
                         ▼
              35 ──┤ MIXER │
                         │
                         ▼
   84 ──┤  LIST OF MATCHING
          CONTENT PROVIDERS
            (LINKS) AND
          ADVERTISEMENTS          FORM#3
                 ┌───────┴───────┐
                 ▼               ▼
   85 ──┤  CONTENT PROVIDER        AD  ├── 34
          DISPATCHER             SELECTOR
                 └───────┬───────┘
                         ▼
              35 ──┤ MIXER │
                         │
                         ▼
   86 ──┤  CONTENT PROVIDER
              HOME PAGE
```

FIG. 8A

FIG. 8B

FIG. 8C

FIG. 9A

90

__INFO BANK__

START — 91

92 — AUTHENTICATION INFO
TRANSACTION INFO

93 — AUTHENTICATION

94 — SEARCH
TRANSACTION LOG
AND FILTER

95 — RESULTS

FIG. 9B

96

__AD AUDITING__

START — 97

98 — AUTHENTICATION INFO
AD INFO CONTENT
PROVIDER INFO

99 — AUTHENTICATION

100 — SEARCH
TRANSACTION LOG
AND FILTER

101 — RESULTS

FIG. 10

110

START ⌐111

112 — FOCUS
AD NAME

33 — CATEGORY
SEARCH ENGINE

114 — LIST OF RELEVANT
ENTRIES PROFILE
INFO AD
PLACEMENT INFO
SELECTION

115 — UPDATE AD INFO
DATABASE TO
INCLUDE THE NEW AD

116 — CONFIRMATION
OF THE AD
BEING INCLUDED
IN THE AD INFO
DATABASE

FIG. 11

120

START ⌐121

122 — FOCUS
PAGE NAME
PAGE URL

33 — CATEGORY
SEARCH ENGINE

124 — LIST OF
RELEVANT ENTRIES
SELECTION

125 — UPDATE CATEGORY
TABLES TO INCLUDE
THE NEW PAGE

126 — CONFIRMATION
OF THE HOME
PAGE BEING
LINKED TO THE
RELEVANT
CATEGORIES

FIG. 12

FIG. 13A

FIG. 13B

File Edit View Go Bookmarks Options Directory Window   Help

Internet DMV – ZAM, November 1995.

DMV on Info Superhighway

DMV gets on the information superhighway. In a recent press release, the Division of Motor Vehicles of Morristown (New Jersey) announced that it is putting up a home page on the internet. It announced that it plans to put up a number of automated transaction services on the internet.

Services will include:

1. Renewal of Automobile License
2. Registration of Automobiles
3. Transferring of Automobile Registration

Division of Motor Vehicles
MORRISTOWN – NEW JERSEY
AUTOMATED RENEWAL OF DRIVING LICENSE !!!

The technical description of Client-Server interaction is as follows:

* The client initiates a transaction by sending a request to the server for the automatically generated form for the required application.

* The server sends the corresponding form with the details of the user's operating at the client profile.

* The user verifies the information and fills in the fields that are blank (e.g., the password) and sends the form back to the server.

* The server processes the information that it received from the client. The server may contact other servers (e.g., Bank Server) on behalf of the client and hence the user to complete the transaction.

* The server then sends back an acknowledgement to the user that the transaction has been successfully completed or terminated as the case might be.

4

FIG. 14

FIG. 15

LIST OF RELEVANT ADS   SIZE OF PRIME SPACE

20

LIST OF AD
CONTRACTS

PRIME SPACE ALGORITHM   150
  ⊠ STORY CONTRACTS
  ⊠ FREQUENCY BASED
  ⊠ PERCENTAGE BASED
  ⊠ EXCLUSIVE CONTRACTS
  ⊠ DEPENDENT CONTRACTS

151

UPDATE CONTRACTS

LIST OF PRIME SPACES ADS

INTERNATIONAL SEARCH REPORT

A. CLASSIFICATION OF SUBJECT MATTER

IPC(6)   : G06F 151:00/00, 153:00/00

US CL : 395/226, 227, 214

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

U.S. :   395/226, 227, 214

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

APS, DIALOG

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 5,283,731 (Lalonde et al.) 01 February 1994, Figs 1-3, 7-9, col. 3, line 42 to col. 4, line 54, col. 12, line 40 to col. 14, line 17.	1-5, 7-11
A	US 5,412,416 (Nemirofsky) 02 May 1995, figs. 1-3, abstact	1-11
A	US 5,448,625 (Lederman) 05 September 1995, figs 1-6, cols. 2-6.	1-11
Y	ONLINE International Command Chart, U.S. Systems, 1985-1986 Edition, See page 6.	6
A,P	APTEX announces SelectCast..., M2 Presswire, M2 Communications, December 5, 1996.	1-11

☐ Further documents are listed in the continuation of Box C.   ☐   See patent family annex.

*	Special categories of cited documents:	"T"	later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
"A"	document defining the general state of the art which is not considered to be part of particular relevance		
"E"	earlier document published on or after the international filing date	"X"	document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
"L"	document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)	"Y"	document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art
"O"	document referring to an oral disclosure, use, exhibition or other means		
"P"	document published prior to the international filing date but later than the priority date claimed	"&"	document member of the same patent family

Date of the actual completion of the international search	Date of mailing of the international search report
06 FEBRUARY 1997	07 MAR 1997

Name and mailing address of the ISA/US Commissioner of Patents and Trademarks Box PCT Washington, D.C. 20231	Authorized officer, GAIL HAYES
Facsimile No. (703) 305-3230	Telephone No. (703) 305-9711